




■ Specifications and Dimensions

Rated load(W.L.L.)	(kg) [t]	250 [0.25]	500 [0.5]
Product Code		LHS025	LHS050
Standard lift	(m)	1.5	1.5
Pull to Lift Full Load	(N) [kgf]	200 [20]	240 [24]
Load Chain Diameter(mm) X Chain Fall Lines	(mm)	3.2X9X1	4.3X12X1
Test Load	(kg)	375	750
Mass(Net Weight)	(kg)	1.55	2.55
Shipping weight	(kg)	1.8	2.8
Mass (weight) for Additional One Meter of Lift	(kg/m)	0.2	0.4
Dimensions (mm)	A	90	98
	B	68	81
	c	200	250
	d	150	172
	E	56	62
	F	35.5	42
	G	20	21
	S	32	34.5
	T	11	12.5

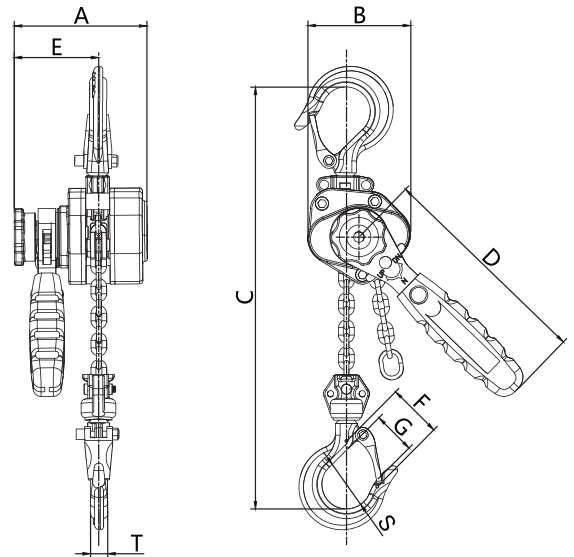

*1: Average pull to lift the rated load.

*2: The Mass (Net Weight) is for the standard lift.

■ Operating Environmental Conditions

Operating temperature range	-40°C ~ +60°C
Operating humidity range	Use the hoist at under 100%RH. This product can not be used in water.

Materials Standard materials are used. Special materials such as sparkless materials and asbestos are not used.